



Timeless natural hues

PANAGET

manufacture française de parquet
DEPUIS 1929



No 1000034

FRENCH OAK AUTHENTIC TOPAZE, SONATE 140 TONGUE & GROOVE / 14 MM

Caracteristics

Species: French oak **Origin:** France

Grade: Authentic - light and dark wood, black knots, filled knots, partially opened knots, discolouration, black marks, cracks. The size of the knots is proportional to the width of the planks.

Finish: Topaze - brushed matt lacquered / Ecostrong lacquer - Shine (gloss): 4/6

Design

Solid single plank under the patent EN 13226
Tongue & Groove



Description

Width: 140 mm
Length: 400 to 1300 mm
Thickness: 14 mm
Top layer: 7.0 mm
Core:
Counterbalance: no
Profile: 4 bevels

Packing

Sqm/pack: 1.64
Pack/pallet: 40
Sqm/pallet: 65.60
Weight/sqm: 10.7 kg
Weight/pallet: 701.9 kg


Installation method




Glue down installation
under the patent DTU
51.2



Fully glue down using
Presto PM



*Emissions of volatile substances which could be toxic if inhaled. These are rated on a scale from A+ (very low) to C (high).



Registration, Evaluation,
Authorisation of Chemicals



PANAGET - 3 rue d'Orgères - 35230 Bourgarré - FRANCE
tel: +33 (0)2 99 05 77 77 // fax: +33 (0)2 99 57 73 55 // www.panaget.com

DECLARATION OF PERFORMANCE

NO 1000034



Unique identification code of the product-type: Sonate 140 Tongue & Groove, 14 mm, French oak

Intended use/es: Solid single plank under the patent EN 13226

Glue down installation under the patent DTU 51.2

Manufacturer: PANAGET - 3 rue d'Orgères 35230 Bourgbarré / FRANCE

System/s of Assessment and Verification of Constancy of Performance: No4

Harmonised standard: EN 14342 : 2013

Declared performances:

Essential features	Performances	Appropriate Technical Documentation and/or Specific Technical Documentation
Reaction to fire	Cfl-s1	EN 14342 : 2013
Features for this classification: - Average minimum density (Kg/m ³) - Average thickness (mm) - Intended use, fitting mode	650 14 Glued to the subfloor	
Formaldéhyde emission	E1	
Content of pentachlorophénol	PCP ≤ 5 ppm	
Release of other dangerous substances: - VOC* emissions (Decree No 2011-321) - CMR 1&2** emissions (Decree No DEV0910046A)	Class A+ < 1µg/m ³	ISO 16000
Breaking strength	N/A	-
Slipperiness	N/A	-
Thermal conductivity (W/m.K)	0.17	EN 14342 / Chapter 4.7
Thermal resistance (m ² .K/W)	0.08	
Biological sustainability	Class 1	EN 335

RE2020 - Building Carbon Index: 8.5 kg.CO₂/m²

French environmental regulation : it aims to reduce the carbon footprint of new buildings over their estimated 50-year life cycle.

FDES 2022 - Life Cycle impact assessment: 1.4 kg éq. CO₂/m²

N/A : Not Applicable

*VOC: Volatile Organic Compounds


**CMR 1&2: Carcinogenics, Mutagens or Reproductive toxin of 1&2 category

The performances of product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011 under the sole responsibility of the manufacturer identified above.

Signed for and behalf of the manufacturer by: Carole FRANÇOIS - Executive Director

Bourgbarré, 16 december 2021

Carole FRANÇOIS

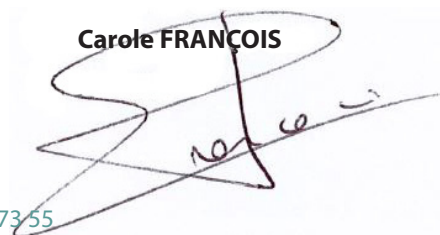

3 rue d'Orgères - 35230 Bourgbarré - FRANCE / tel: +33 (0)2 99 05 77 77 - fax: +33 (0)2 99 57 73 55

Entreprise dont le système qualité a été **certifié ISO 9001** par Bureau Veritas Certification.

SAS au capital de 4 957 200 € - RCS Rennes B 402 853 220 - Siret : 402 853 220 000 34 - APE : 1622 Z - No TVA : FR 0640 2853220

www.panaget.com