



Elegant browns

PANAGET

manufacture française de parquet
DEPUIS 1929



No 1019688

TEAK PRE OILED, ULYSSE 90 TONGUE & GROOVE / 12 MM

Caracteristics

Species: Teak **Origin:** Indonesia

Grade: yellowish brown to dark brown. Variation in colour from one strip to the next, quarter, sawn, knots, discolouration allowed.

Finish: Pre-oiled - brushed, natural matt oiled / Hard wax oil - Shine (gloss): 5/8

For oiled wood floors, apply a thin coat of Panaget maintenance oil right after installation. Please refer to our maintenance guide. Not permitted as a water receptable (shower tray).

Design

Solid single plank for wet areas made under the patent EN 13226
Tongue & Groove



Description

Width: 90 mm

Length: 300 to 1200 mm

Thickness: 12 mm

Top layer: 4.0 mm

Core: no

Counterbalance: no

Profile: square edged

Packing

Sqm/pack: 1.51

Pack/pallet: 44

Sqm/pallet: 66.53

Weight/sqm: 8.4 kg

Weight/pallet: 844.9 kg

Installation method



Glue down installation
under the patent DTU
51.2



Glue down installation
under the patent DTU 51.2



Floating installation using
plastic DPM and Isol 20 or fully
glue down using Presto PM



Fully glue down using
Presto PM



*Emissions of volatile substances which could be toxic if inhaled. These are rated on a scale from A+ (very low) to C (high).



Registration, Evaluation,
Authorisation of Chemicals

PANAGET - 3 rue d'Orgères - 35230 Bourgbarré - FRANCE
tel: +33 (0)2 99 05 77 77 // fax: +33 (0)2 99 57 73 55 // www.panaget.com

DECLARATION OF PERFORMANCE

NO 1019688

Unique identification code of the product-type: Ulysse 90 Tongue & Groove, 12 mm, Teck

Intended use/es: Solid single plank under the patent EN 13226

Glue down installation under the patent DTU 51.2

Manufacturer: PANAGET - 3 rue d'Orgères 35230 Bourgbarré / FRANCE

System/s of Assessment and Verification of Constancy of Performance: No4

Harmonised standard: EN 14342 : 2013

Declared performances:

Essential features	Performances	Appropriate Technical Documentation and/or Specific Technical Documentation
Reaction to fire	Dfl-s1	EN 14342 : 2013
Features for this classification: - Average minimum density (Kg/m ³) - Average thickness (mm) - Intended use, fitting mode	390 12 Glued to the subfloor	
Formaldéhyde emission	E1	
Content of pentachlorophénol	PCP ≤ 5 ppm	
Release of other dangerous substances: - VOC* emissions (Decree No 2011-321) - CMR 1&2** emissions (Decree No DEVP0910046A)	Class A+ < 1µg/m ³	ISO 16000
Breaking strength	N/A	-
Slipperiness	N/A	-
Thermal conductivity (W/m.K)	0.17	EN 14342 / Chapter 4.7
Thermal resistance (m ² .K/W)	0.071	
Biological sustainability	Class 1	EN 335

N/A : Not Applicable

*VOC: Volatile Organic Compounds


**CMR 1&2: Carcinogenics, Mutagens or Reproductive toxin of 1&2 category

The performances of product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011 under the sole responsibility of the manufacturer identified above.

Signed for and behalf of the manufacturer by: Carole FRANÇOIS - Executive Director

Bourgbarré, 16 december 2021

Carole FRANÇOIS

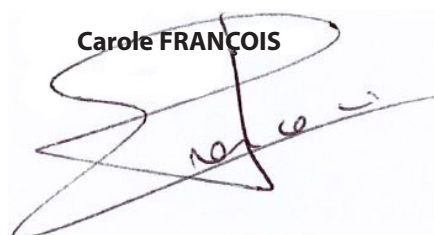

3 rue d'Orgères - 35230 Bourgbarré - FRANCE / tel: +33 (0)2 99 05 77 77 - fax: +33 (0)2 99 57 73 55

Entreprise dont le système qualité a été certifié ISO 9001 par Bureau Veritas Certification.

SAS au capital de 4 957 200 € - RCS Rennes B 402 853 220 - Siret : 402 853 220 000 34 - APE : 1622 Z - No TVA : FR 0640 2853220

www.panaget.com